


NOTES :

1. Material : S-BSM14
Nd : 1.603112 ± 0.0005
Vd : $60.64 \pm 0.8\%$
2. Interpret optical tolerance per ISO 10110
3. Coat R1&R2 surface as follows :
Pave < 0.5% AT 420-680nm
Pabs < 1% AT 420-680nm
Tabs > 95% AT 420-483nm
Tave > 98.5% AT 483-680nm
Tabs > 96% AT 483-680nm
4. Coating area R1 > $\varnothing 16.00$
R2 > $\varnothing 16.00$
5. Coatings test methods per ISO 9211-4
Abrasion : degree of severity 04 x 1
Adhesion : degree of severity 03 x 3
6. Surface quality 60-40 per MIL-PRF-13830B
7.  The main inspection dimension

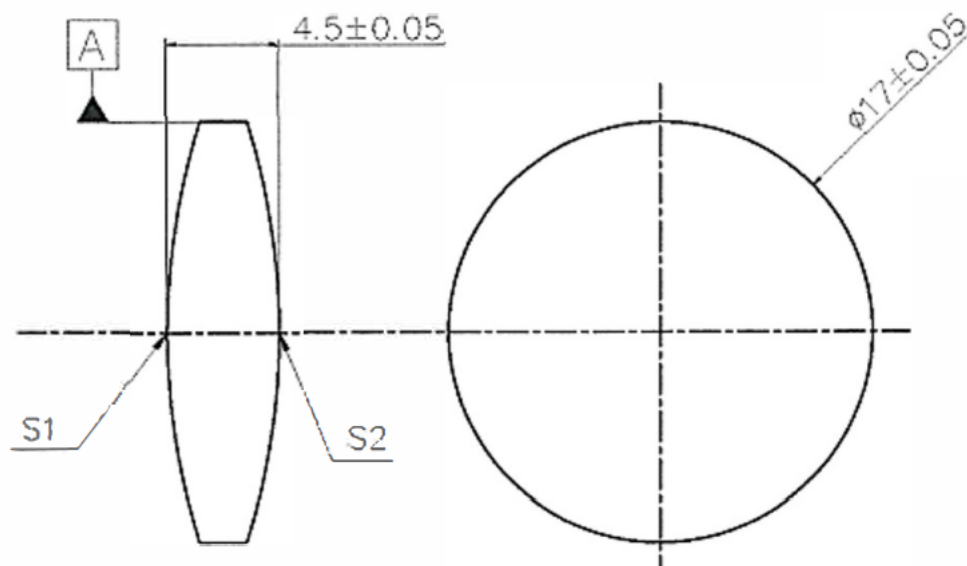

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 17mm Dia., 4.5mm Thk. Double-Convex Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1C009	Rev.	01	