

NOTES :

1. MATERIAL:H-FK

Nd:1.496998±0.0005

Vd:81.5947±0.8%

2. INTERPRET OPTICAL TOLERANCES PER ISO 10110

3. COAT TWO SURFACES AS FOLLOW

Rabs<0.5% AT 430-650nm

450nm T > 98.0% (FAI check)

550nm T > 98.5% (FAI check)

630nm T > 98.5% (FAI check)

4. COATINGS SHALL MEET FOLLOW ISO 9211-4

ABRASION: DEGREE OF SEVERITY 04x1

ADHESION: DEGREE OF SEVERITY 03x3


(USING 3M TYPE-600)

5. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B

6. Coating range R1> ϕ 21.10 mm

R2 > ϕ 21.50 mm

7. The main inspection dimension

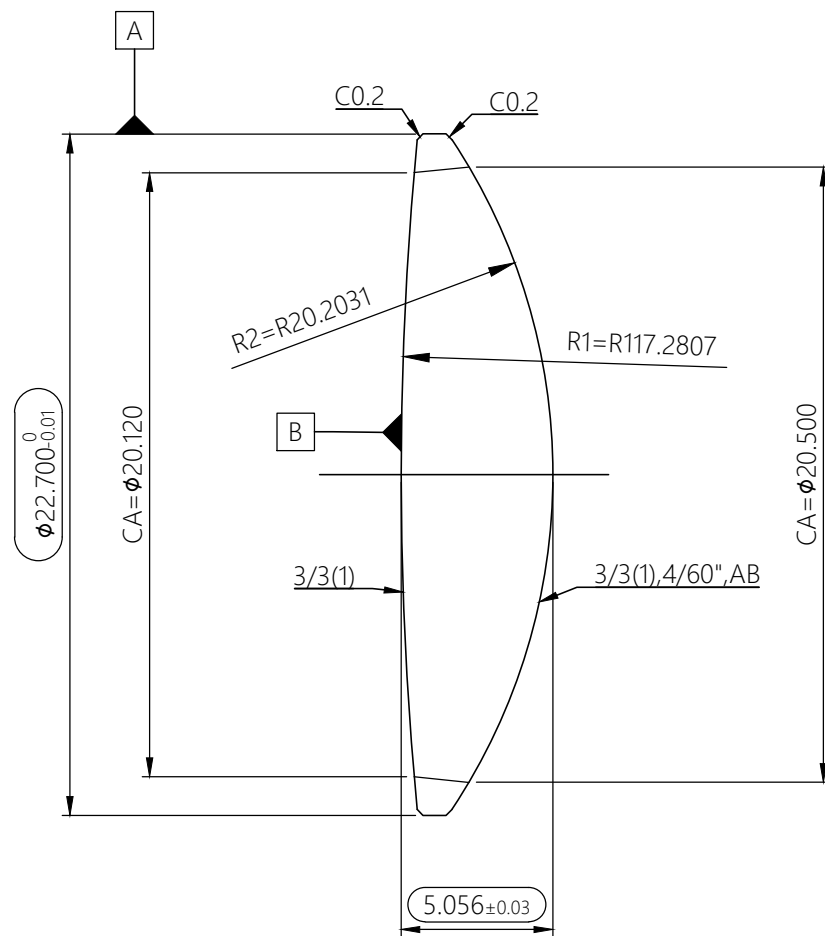

SY 上陽光學
SUN YANG OPTICS

Material: See note		Surface Finish: See Note			TITLE: 22.7mm Dia., 5.506 Thk. Double-Convex Lens			
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1C015	Rev.	01	