

NOTES :

1. Material : E-FDS2

Nd : 2.002723 ± 0.0003

Vd : $19.317191 \pm 0.5\%$

2. Interpret optical tolerance per ISO 10110

3. Coat R1&R2 surface as follows :

Rabs<0.5% AT 790-820nm

Rabs<0.5% AT 450-650nm

Rabs<0.6% AT 440nm

Rabs<0.7% AT 430nm

Tabs>98.1% AT 820nm

4. Coating area R1> $\varnothing 24$

R2> $\varnothing 26$


5. Coatings test methods per ISO 9211-4

Abrasion : degree of severity 04 x 1

Adhesion : degree of severity 03 x 3

6. Surface quality 60-40 per MIL-PRF-13830B

7. The main inspection dimension

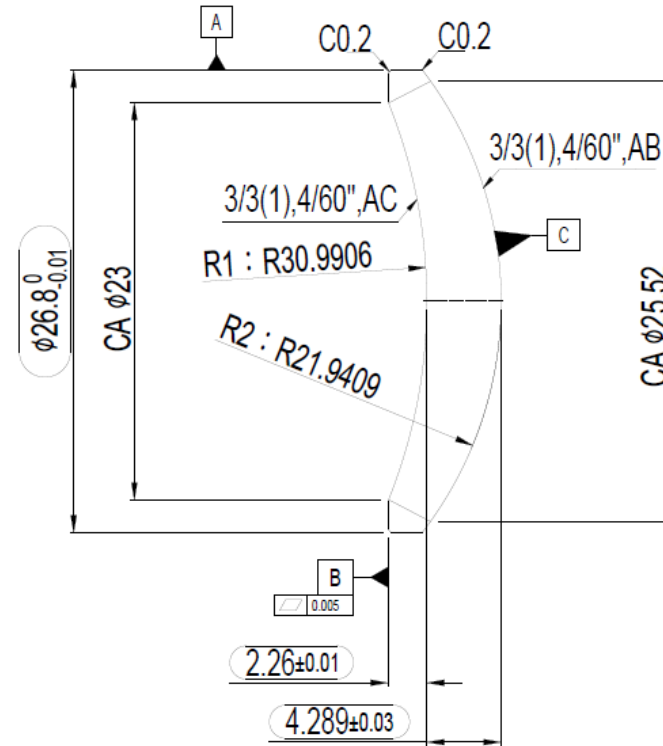

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 26.8mm Dia., 4.289mm Thk. Diverging Meniscus Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1F018	Rev.	01	