


NOTES :

1. MATERIAL: H-LAK61/H-ZF88
2. INTERPRET OPTICAL TOLERANCES PER ISO 10110
3. COAT R1 & R2 SURFACES AS FOLLOWS:
Rabs < 0.6% AT 440-650nm
Rabs < 1.2% AT 830-960nm
4. Coating area R1>Ø3.3
R2>Ø5.3
5. Coatings test methods per ISO 9211-4
Abrasion : degree of severity 04 x 1
Adhesion : degree of severity 03 x 3
6. SURFACE QUALITY:60-40,SCRATCH AND DIG PER MIL-PRF-13830B
7.  The main inspection dimension

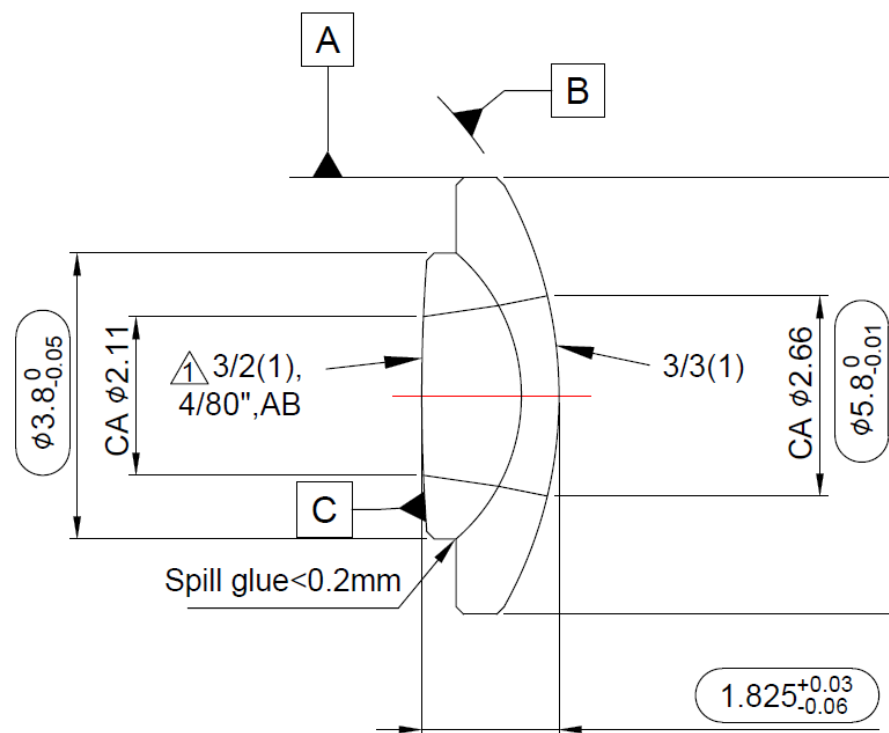

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 5.8mm Dia., 1.825mm Thk. Achromatic Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1A001	Rev. 01
free	mm	A4	1/1			

NOTES:

1. MATERIAL:H-LAK61

Nd:1.741± 0.0003

Vd:54.676 ± 0.5%

2. INTERPRET OPTICAL TOLERANCES
PER ISO 10110

3. COAT R1 SURFACES AS FOLLOWS:

Rabs <0.6% AT 440-650nm

Rabs <1.2% AT 830-960nm


4. Coatings test methods per ISO 9211-4

Abrasion : degree of severity 04 x 1

Adhesion : degree of severity 03 x 3

5. SURFACE QUALITY: 60-40, SCRATCH AND
DIG PER MIL-PRF-13830B

6. The main inspection dimension

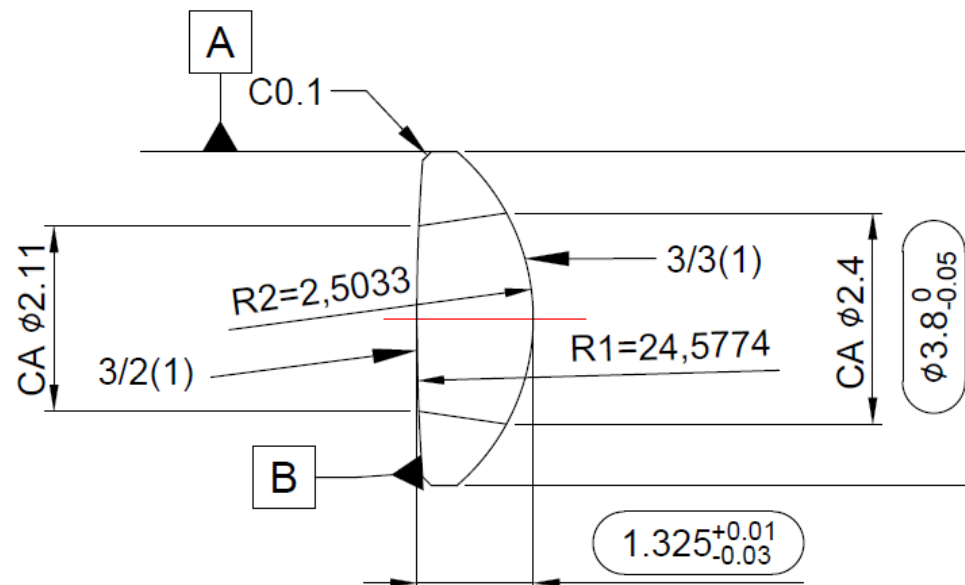

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 3.8mm Dia., 1.325mm Thk. Double-Convex Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1A001	Rev. 01
free	mm	A4	1/1			

NOTES:

1. MATERIAL:H-ZF88

Nd:1.946± 0.0003

Vd:17.942 ± 0.5%

2. INTERPRET OPTICAL TOLERANCES
PER ISO 10110

3. COAT R2 SURFACES AS FOLLOWS:

Rabs <0.6% AT 440-650nm

Rabs <1.2% AT 830-960nm


4. Coatings test methods per ISO 9211-4

Abrasion : degree of severity 04 x 1

Adhesion : degree of severity 03 x 3

5. SURFACE QUALITY: 60-40, SCRATCH AND DIG
PER MIL-PRF-13830B

6.  The main inspection dimension

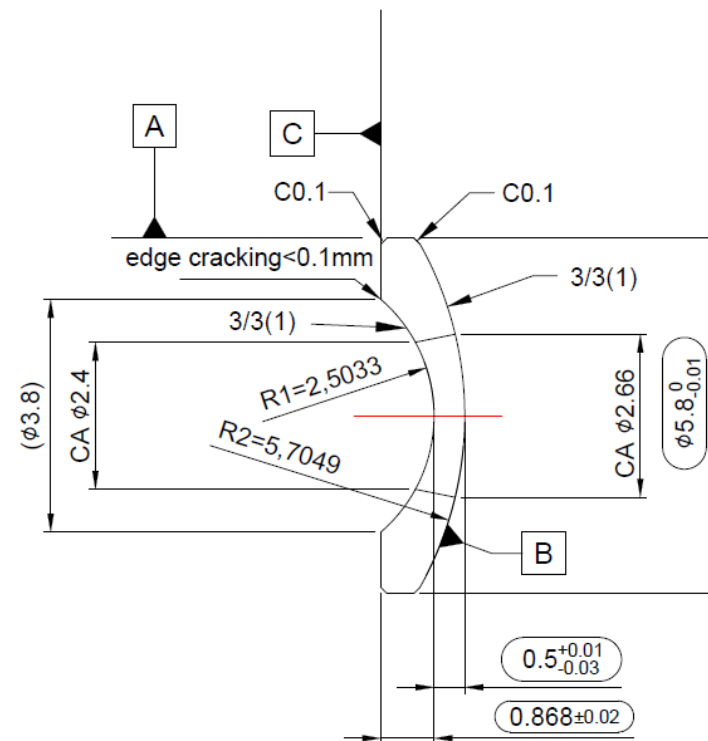

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 5.8mm Dia., 0.5mm Thk. Diverging Meniscus Lens		
See note	See Note				
Scale:	Unit:	Size:	Sheet:	Stock No.	Rev.
free	mm	A4	1/1	1A001	01