


NOTES:

1. MATERIAL: H-FK61/H-ZF72A
2. INTERPRET OPTICAL TOLERANCES PER ISO 10110
3. COAT R1 SURFACE AS FOLLOWS:
R(abs.)<0.3% AT 430-650nm
COAT R2 SURFACE AS FOLLOWS:
R(abs.)<0.5% AT 430-650nm
4. COATINGS SHALL MEET ADHESION USING 3M
TYPE-600 TAPE AND 1KG MIL-E-12379B RUBBER
TEST
5. SURFACE QUALITY:80-50,SCRATCH AND DIG PER
MIL-PRF-13830B
6.  The main inspection dimension

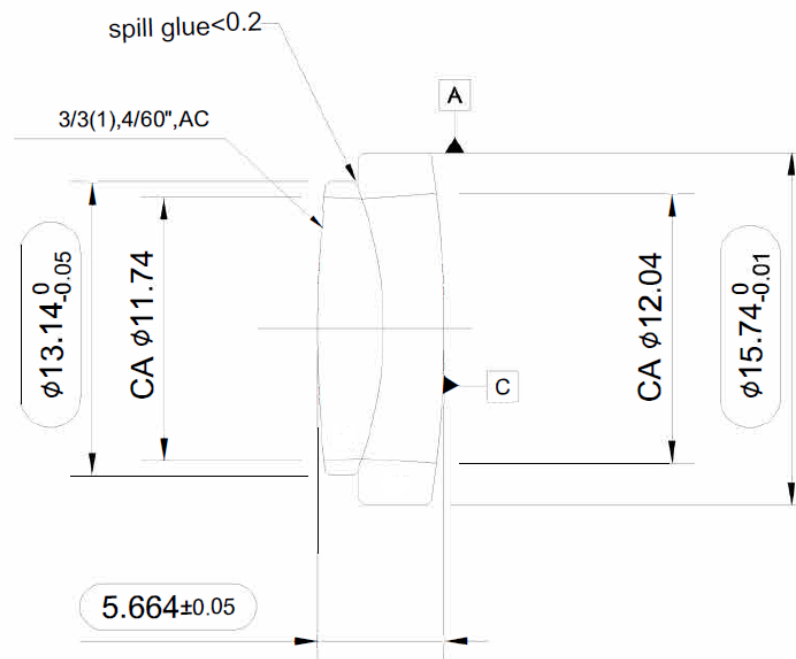


SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 15.74mm Dia., 5.664mm Thk Achromatic Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1A011	Rev.	01	

NOTES:

- Material: H-FK61
nd: 1.496997 $\pm$ 0.0005
vd: 81.6084 $\pm$ 0.5%
- Interpret optical tolerances per ISO10110
- Coat R1 Surface as follows :
R(abs.) <0.3% at 650nm
R2 surface without COATING
- Coating shall meet adhesion using 3M Type -600
tape and 1KG MIL-E-12379B
- Surface Quality:80-50, scratch and dig per
MIL-PRF-13830B
- Coating Area R1 > ϕ 11.8 , R2 no coating
-  The main inspection dimension

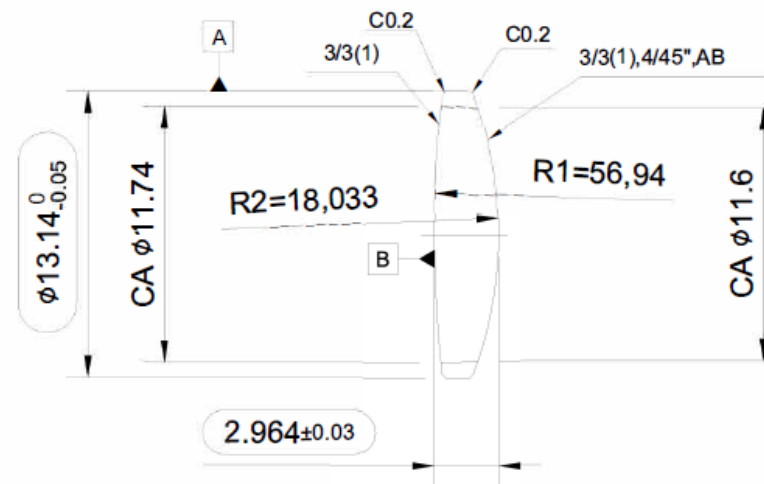

SV 上陽光學
SUN YANG OPTICS

Material:	Surface Finish:		TITLE: 13.14mm Dia., 2.964mm Thk. Double-Convex Lens			
See note	See Note					
Scale:	Unit:	Size:	Sheet:	Stock No.	1A011	Rev. 01
free	mm	A4	1/1			

NOTES:

1. MATERIAL: H-ZF72A

Nd: 1.922867 ± 0.0005

Vd: $18.8955 \pm 0.5\%$

2. INTERPRET OPTICAL TOLERANCES PER ISO 10110

3. R1 SURFACE without COATING

COAT R2 SURFACE AS FOLLOWS:

R(abs.) < 0.5% AT 430-650nm


4. COATINGS SHALL MEET ADHESION USING

3M TYPE-600 TAPE AND 1KG MIL-E-12379B

5. SURFACE QUALITY: 80-50, SCRAICH AND DIG PER

MIL-PRF-13830B

6.  The main inspection dimension

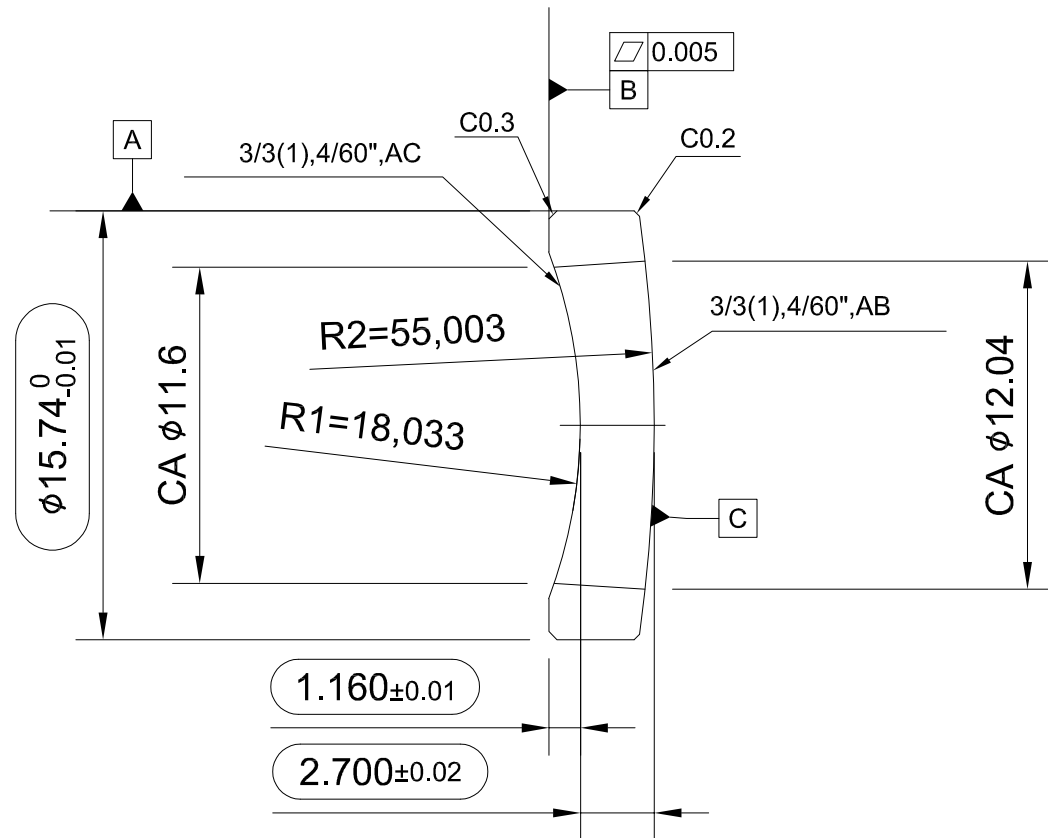

SV 上陽光學
SUN YANG OPTICS

Material:		Surface Finish:			TITLE: 15.74mm Dia., 2.7mm Thk. Diverging Meniscus Lens			
See note		See Note						
Scale:	Unit:	Size:	Sheet:					
free	mm	A4	1/1	Stock No.	1A011	Rev.	01	